



ROLLS • TILES



Specifications

Item	Standard	Rating
Density	ASTM E96	68.3lbs/cubic feet
Tensile Strength	ASTM D412	265 psi
Tear Resistance	ASTM D413	Average elongation at break 1.52
Hardness	D2240	Shore A 65 +/- 5
Slip Resistance	D C1028	Coefficient of Friction .084-.090
Abrasion	D4060	2,000 cycles taber abraser 1kg, 0.329g - 0.35g loss
Flammability	ASTM E648	Critical Radiant Flux <0.10W/cm2
Chemicals	N/A	Resistant to most acids and chlorine
Volatile Organic Compounds	CDPH v1.2	<.05mg/m3

Survivor products contribute up to 5 POINTS in two LEED categories

- MR - Building Product Disclosure and Optimization: Environmental Product Declarations (Option 1)
- MR - Building Product Disclosure and Optimization: Environmental Production Declarations (Option 2)
- MR - Building Product Disclosure and Optimization: Sourcing of Raw Materials
- MR - Building Product Disclosure and Optimization: Material Ingredients
- EQ - Low Emitting Materials



Our mission is to empower our committed employees, many seeking a second chance in their life and career, so they can responsibly increase demand for products manufactured with raw materials diverted from a waste stream, creating a second life for such materials and reducing the need for virgin materials, and by doing so, will improve the economic vitality and environmental sustainability of our community.




www.usrubber.com
info@usrubber.com
(833) US RUBBER (877-8223)

Isometrics


- Standard with 10% color fleck
- 19 color choices available




Blue 109

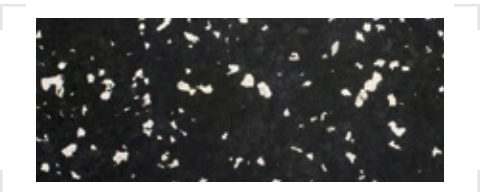


Chrome 110

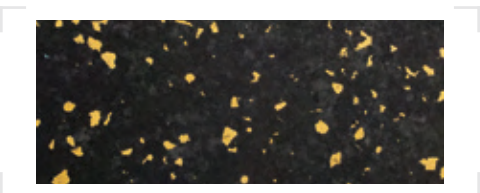


Gold 88

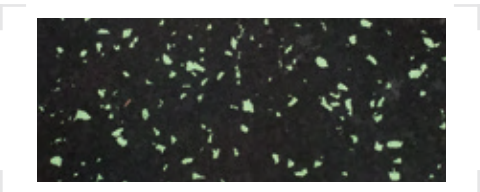

Light Green 108

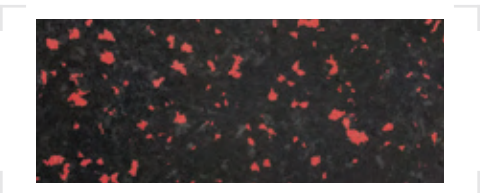


Red 96

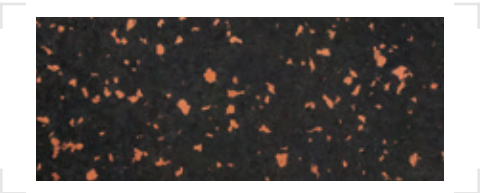


Terra 80




Brown 89

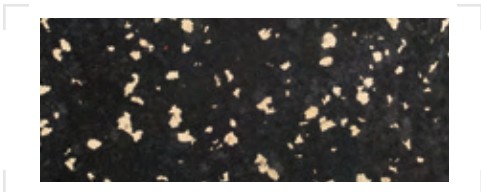

Cream 98

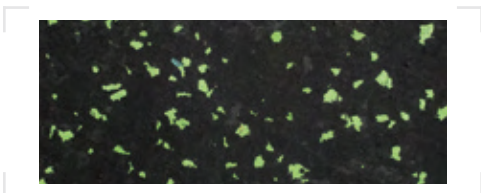


Green 91

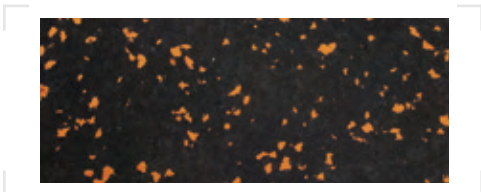

Orange 104




Spa 85

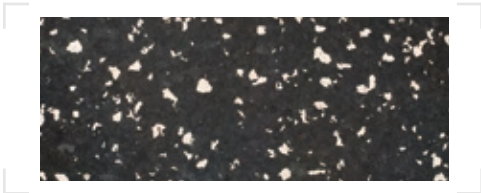


White 94




Beige 93

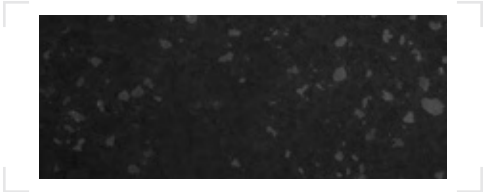


Charcoal 114

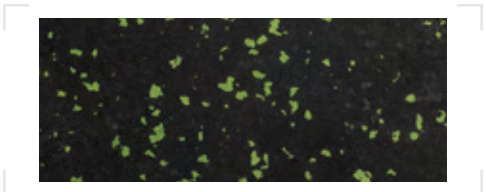


Forest 90

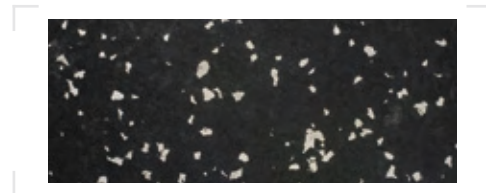


Grey 82

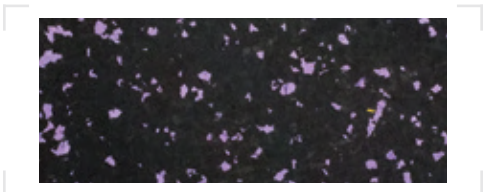

Purple 92

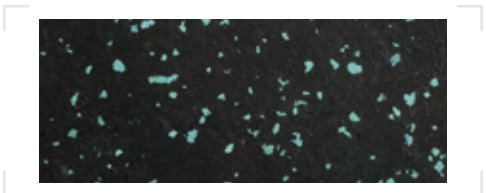

Teal 100

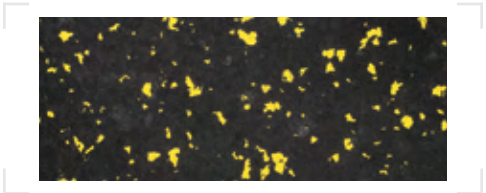


Yellow 83

Cross Training

- Standard with 20% color fleck
- 16 pre-designed color blends




Carnival
80, 88, 91, 93, 96, 109

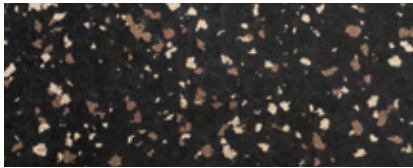


Desert Storm
89, 93



Brick-n-Mortar
80, 94

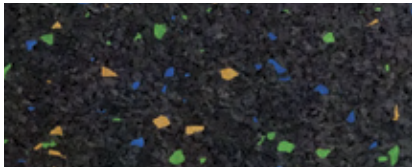

Electrolyte
88, 91, 109

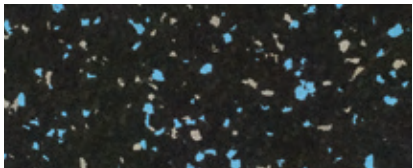


Extreme Serene
82, 85




Glacier
82, 109




In the Zone
96, 110

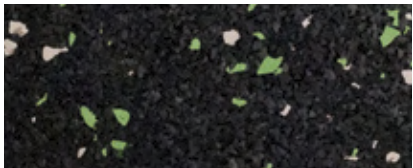


Margarita
91, 94

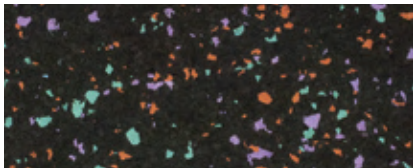


Miami Muscle
80, 92, 100

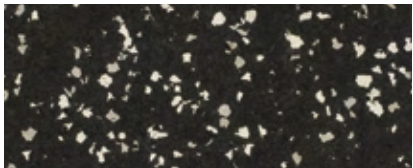


Nerves of Steel
82, 110

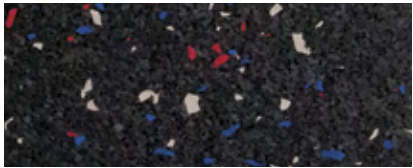


Patriot
96, 109, 110

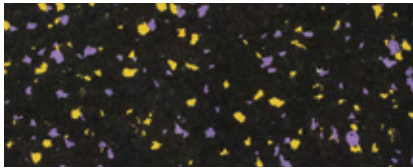


Planet Hollywood
83, 92

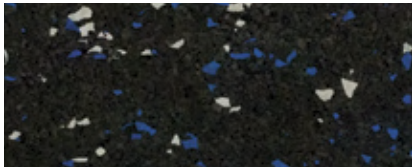


Sea-n-Sand
94, 109

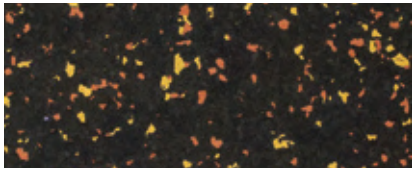

Trailblazer
80, 88

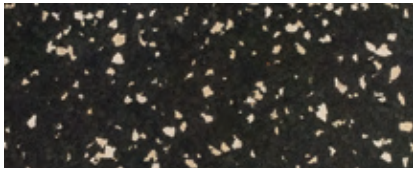


Trophy
93, 94

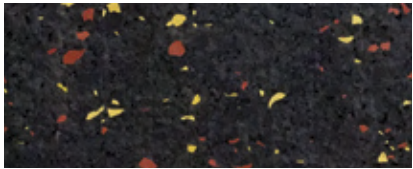


Vision Quest
80, 83



- Standard with 85% color fleck
- 2-4 color fleck blends

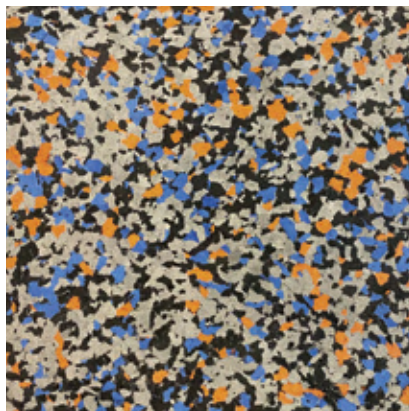


Bronco
82, 104, 109

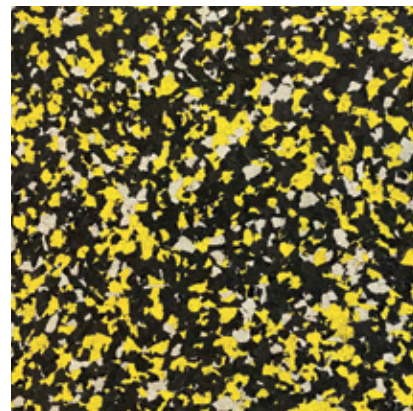


Bumblebee
82, 83




Celebration
82, 83, 96, 109

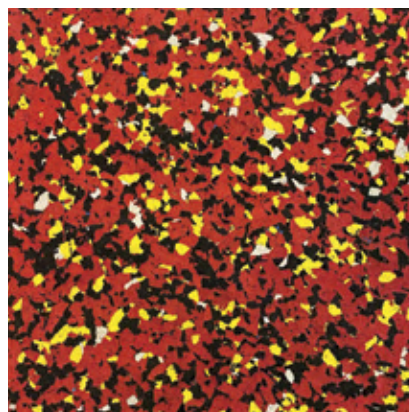


Del Sol
83, 96, 110

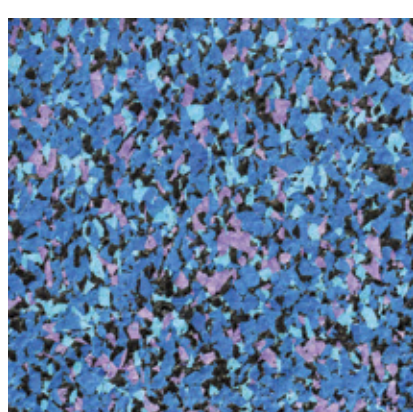

High Dive
85, 92, 109

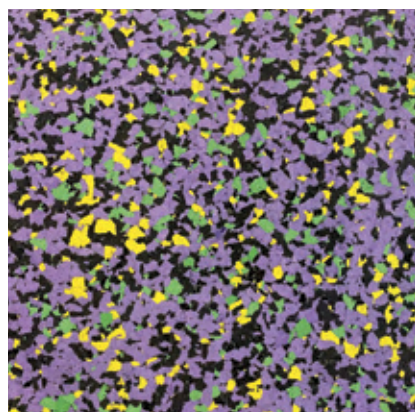

Mardi Gras
83, 91, 92

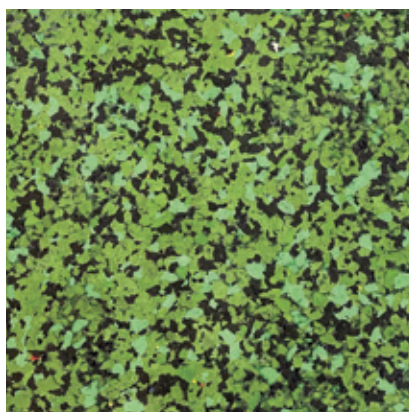

Smash
90, 91




Surf's Up
93, 94, 98, 109



For customization, please see the ColorBuilder™ interactive design tool at www.usrubber.com/color-builder-design-tool




- Standard with 20% color fleck
- Combines BigChip™ with regular fleck

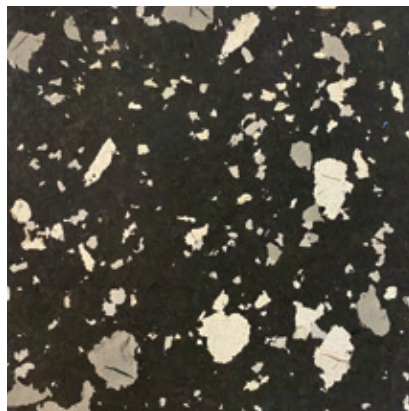


Avalanche

82, 82-BC, 110, 110-BC

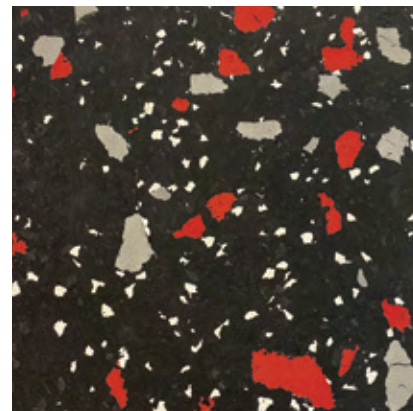


Buckeye

82-BC, 96-BC, 110

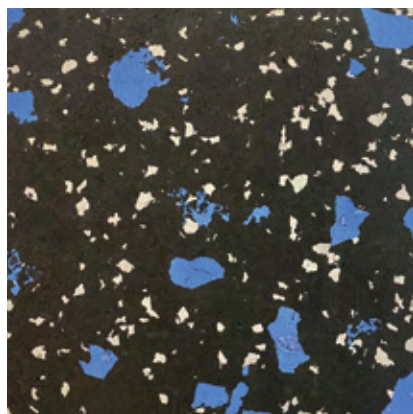


Iceberg

82, 109-BC

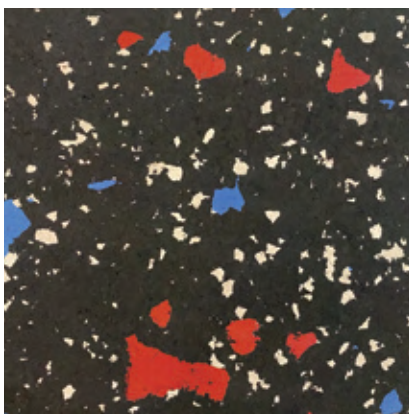


Merica

94, 96-BC, 109-BC

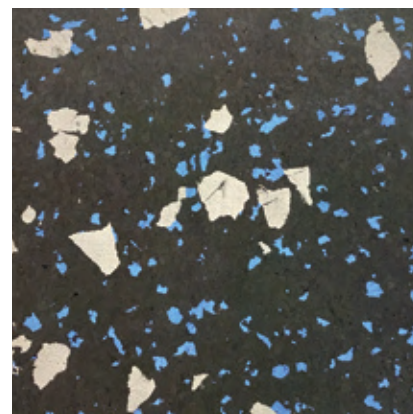


Polar

82-BC, 109

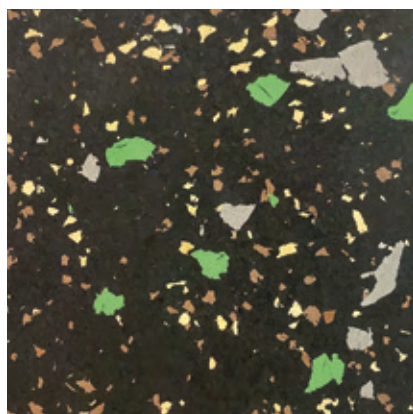


Rambo

82-BC, 88, 89, 91-BC

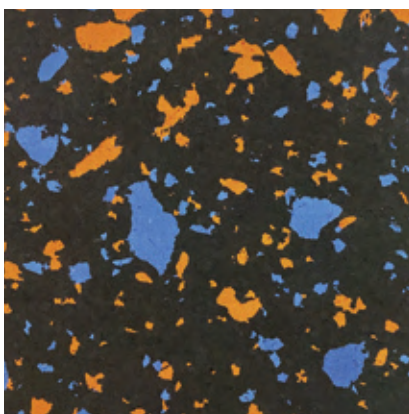

Stallion

104, 104-BC, 109, 109-BC

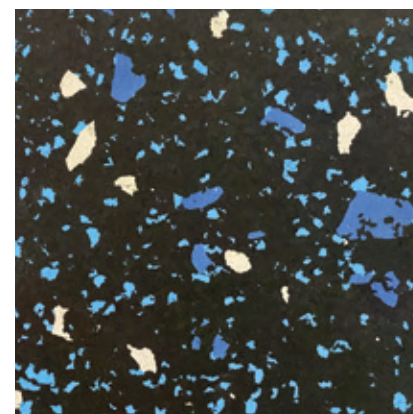


Tighten Up


85, 109-BC, 110-BC




- Standard with 20% color fleck
- 2-3 times larger than regular fleck

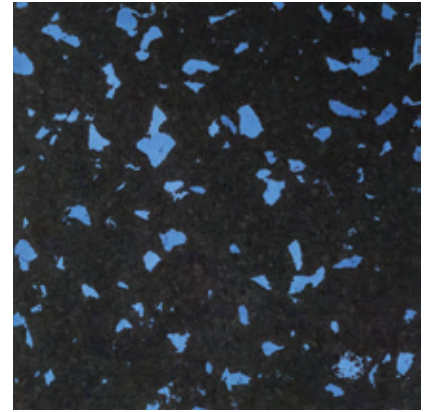

Blue 109-BC

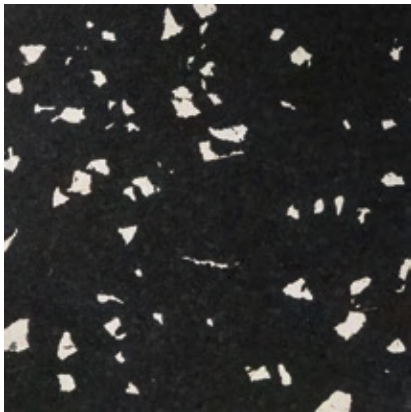


Chrome 110-BC

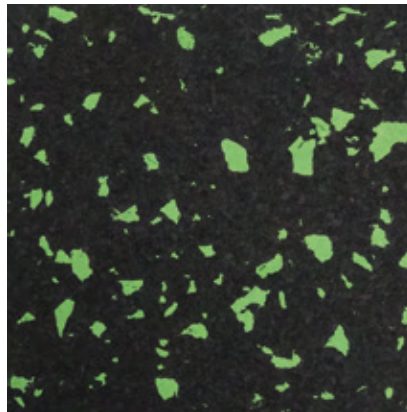


Green 91-BC




Grey 82-BC

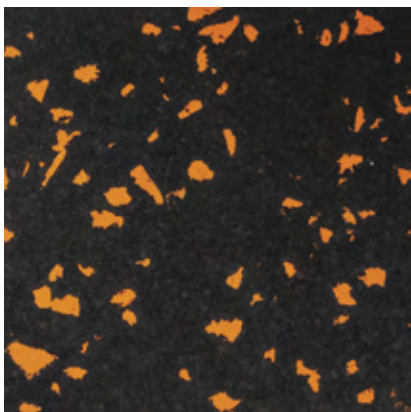

Orange 104-BC

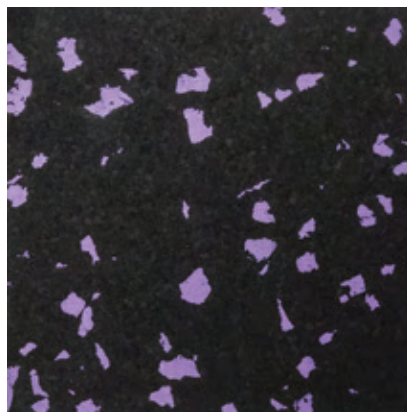

Purple 92-BC

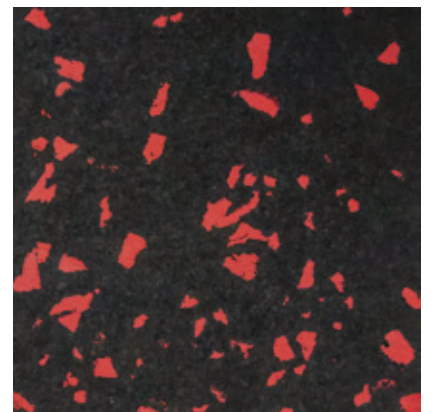


Red 96-BC

Color Options



Color Gradient

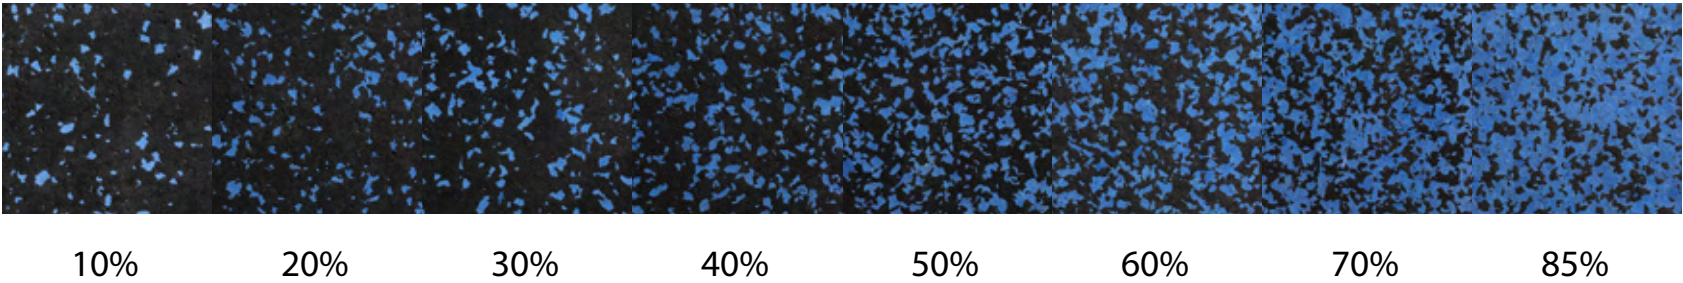


25 Year Limited Warranty

U.S. Rubber Recycling warrants to the first purchaser for use that its merchandise is free of defects in material and workmanship for a period of twenty five (25) years from the date of invoice, provided that such merchandise is listed in U.S. Rubber Recycling’s current price list at the time of the claim and such defects are not the result of ordinary wear and tear or an Act of God. U.S. Rubber Recycling’s obligation under this warranty is limited to repair or replacement, at its option, and such repair or replacement shall be the only remedy. U.S. Rubber Recycling is not responsible for damage due to transportation, improper handling, alteration, abuse or negligence. U.S. Rubber Recycling shall not be

liable for any incidental or consequential damages including, but not limited to, any expenses associated with the removal or installation of any defective merchandise covered by this warranty. With respect to flooring and underlayment, U.S. Rubber Recycling’s warranty is null and void if product is (i) stored for more than forty five (45) days or (ii) stored or installed in an environment where temperature and humidity are not controlled 24/7/365. U.S. Rubber Recycling makes no implied warranty of merchantability or fitness for any particular purpose. ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, ARE EXCLUDED.

Roll Dimensions

Thickness Chart

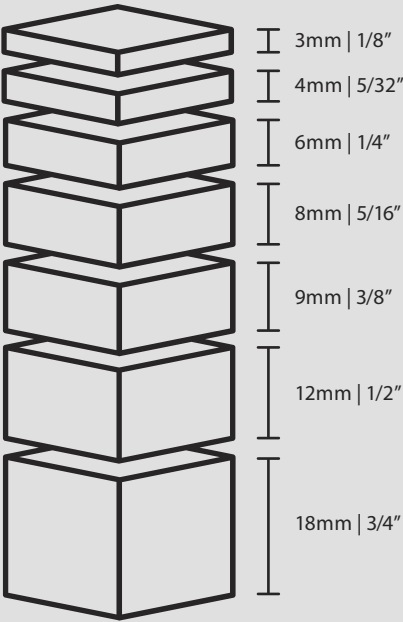


Thicknesses	Lengths*
3mm 1/8"	75'
4mm 5/32"	75'
6mm 1/4"	75'
8mm 5/16"	50'
9mm 3/8"	50'
12mm 1/2"	50'
18mm 3/4"	15'

*Custom Lengths are always available



Tile Dimensions

Thickness Chart

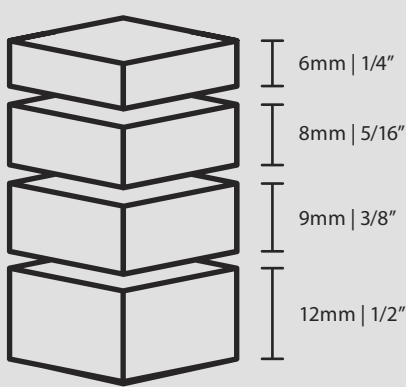

Thicknesses

Interlocking & Square Tile

- 6mm | 1/4"
- 8mm | 5/16"
- 9mm | 3/8"
- 12mm | 1/2"

Eco-Lock Tile

- 6mm | 1/4"
- 8mm | 5/16"

Sizes/Styles

